

Technical Specification

Class	S300	Remark
Design (Light Head)		
Installation	Single Ceiling Dual Ceiling Mobile	
Head Size (cm)	43,5	
No. of LED (ea)	42	
Intensity (lx)	130,000	Dental : 30,000 Exam : 60,000
Intensity Control	3 Steps (40,000~130,000)	
C.R.I (Ra/R9)	96 / 95	
Color Temp. (K)	3,800 / 4,300 / 4,800	
Light Field Size (cm)	3 Steps (15~25, Circle)	
Detachable Centre Grip	Yes (2X)	
Input Power	100~240Vac, 50/60Hz	
LED Life(Hrs)	60,000	
Option	Wall Controller (Tablet PC) Backup Battery	



D-R-LVS300-V1-201910-ENG

DENTIS Co., LTD. (HEADQUARTERS) 99, Seongseoseo-ro, Dalseo-gu, Daegu, Korea Tel +82-53-583-2804 / Fax +82-53-583-2806
(MEDICAL DIVISION) 41065 6, Yuram-ro, Dong-gu, Daegu, Korea (Seoul Office) 286, Beotkkot-ro, Geumcheon-gu, Seoul, Korea Tel +82-2-869-6020
© 2019 DENTIS CO.,LTD. All Right Reserved. Trademarks are the property of DENTIS CO., LTD. Or their respective owners. Specifications are subject to change without notice.



Medical LED Illumination
Surgical LED Light
Luvis S300




Luvís S300


130,000 lx



- Illumination Intensity**
3 Step adjustment (Max. 130,000 lx)
- Light Field Size**
3 Step adjustment (Max. 25cm / Min. 15cm)
- Color Temperature**
3,800K / 4,300K / 4,800K
- Color Rendering Index**
Ra 96 / R9 95
- 3 Different Modes**
Surgical mode (130,000 lx)
Examine mode (60,000 lx)
Dental mode (30,000 lx)

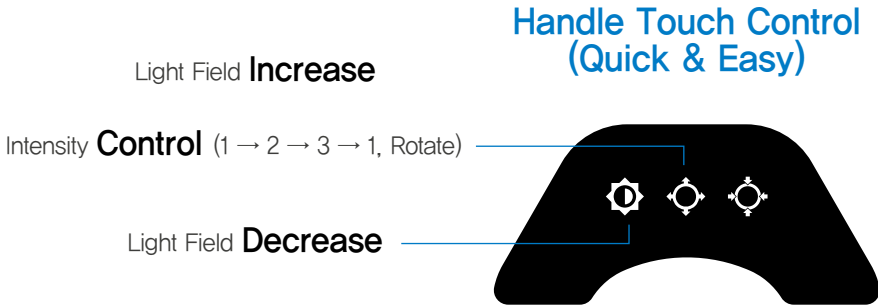

ARM Touch Control (4.3" LCD)

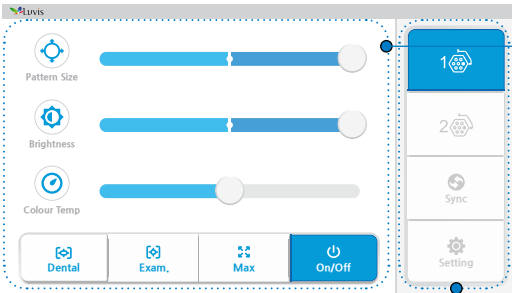


- OT Light (1 or 2) Control**
- Light 1 / Light 2 Select
 - Light ON/OFF
 - Light Field Size, Intensity, Color Temp
- Sync Mode**
- OT Light (1 and 2) Sync

- Dental Mode**
- Dental Light ON/OFF
 - Intensity Control
- Examination Mode**
- Examin. Light ON/OFF
 - Intensity, Color Temp. Control
- Max. Mode_OT Light**
- Light Field Size 3 Level and Intensity 3 Level Setting
- Light On/Off**

OT Light 1 (S300)▼

OT Light 2 (S300)▼

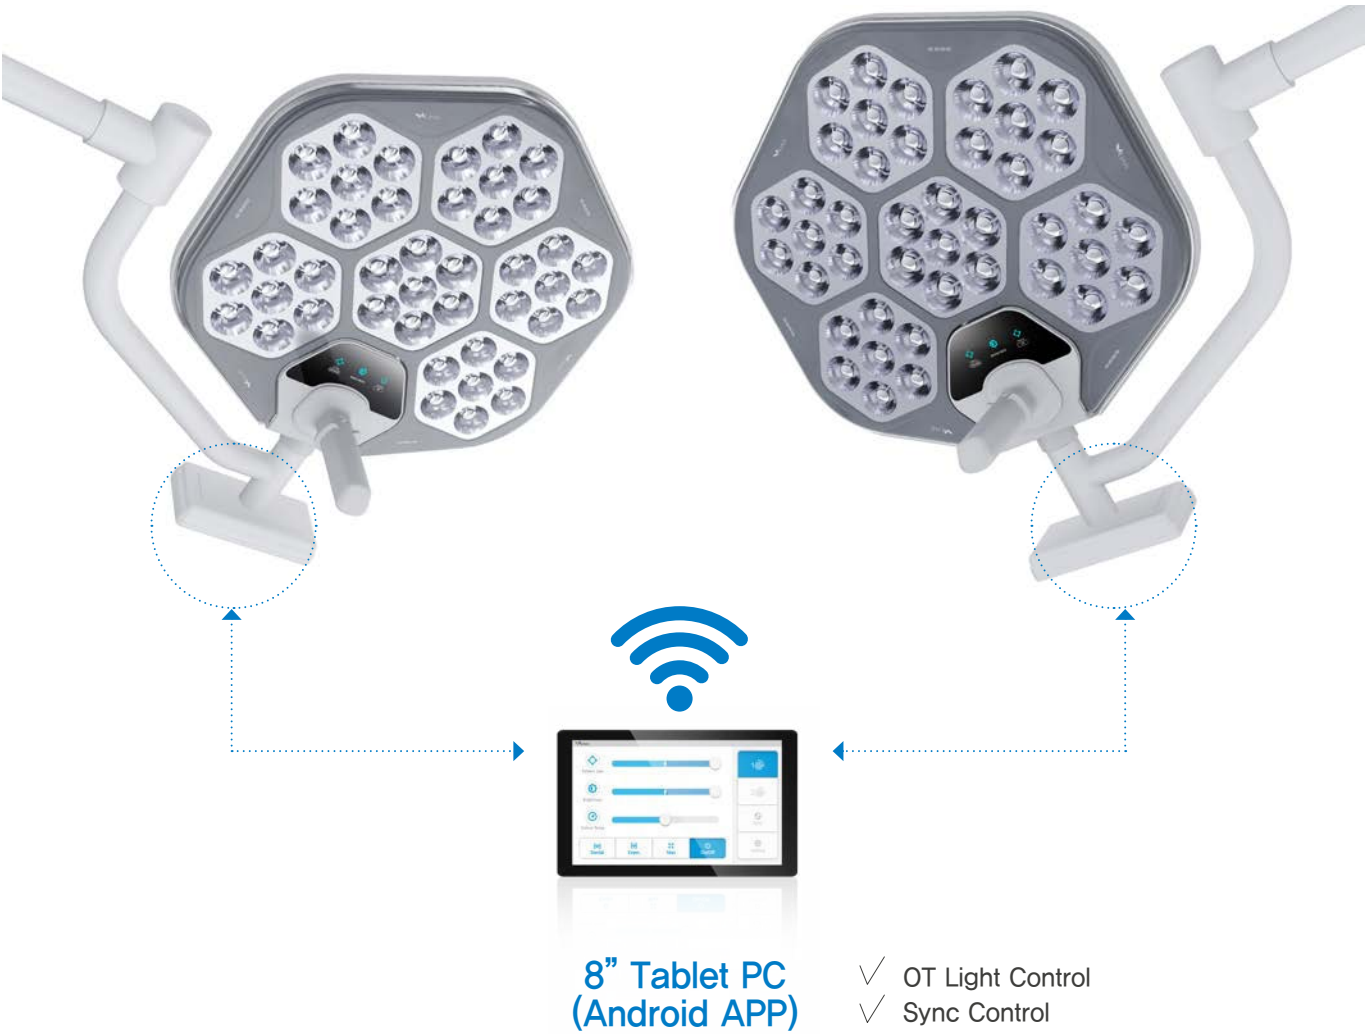

Back-up Battery

- Over Voltage Detection
- Under Voltage Detection
- Discharging Over Current Detection
- Short Circuit Detection
- Cell Balancing, PTC
- Life cycle : 300 cycle (charge/discharge)
- Duration : 3 Hours

Specifications	
Rating	20~28Vdc, 4A (Lithium-ion Battery)
Dimension	244x164x120mm
Weight	3.8kg

